


# ZWN-BPC

Ceiling Mounted ,Battery Powered PIR Sensor



## FEATURES

- Adopt wireless RF technology
- Low battery indication
- Support Z-Wave associations
- Adjustment PIR Sensitivity
- LED motion indicator
- Send RF signals to up to 5 associated Z-Wave devices.

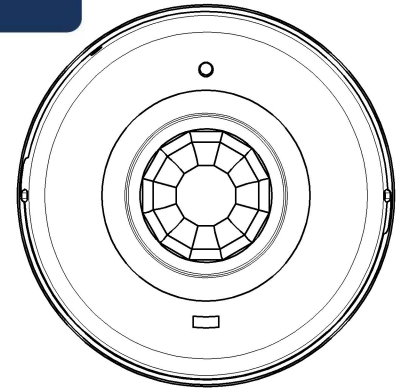

## DESCRIPTION

The PIR Ceiling Sensor ZWN-BPC is a Z-Wave enabled device and is fully compatible with any Z-Wave enabled network. This PIR Ceiling Sensor can control our modules, such as ZWN-RSM2 (Smart Lighting Control module), it can also trigger a Z-Wave enabled alarm when motion is detected.

It is acting as a monitoring device by detecting changes in infrared radiation levels. When a person moves within or across the device field of coverage, trigger radio signal will be transmitted to associated Z-Wave devices.

## ORDERING INFORMATION

**CAT.NO.:** ZWN-BPC (Ceiling Mounted ,Battery Powered PIR Sensor)

## SPECIFICATIONS

Power Supply.....2AA batteries(not included)  
 Sensitivity Adjustment.....Position 1 to Position 4  
 Test Mode.....15sec.  
 Range.....Up to 100 feet line of sight  
 RF Frequency.....908.42MHz(US)  
 PIR Detection Coverage..... Up to 600ft<sup>2</sup>

05222015

Rev. D