




ZW15SM

Enerwave ZW15SM Z-WAVE Wireless In-wall Smart Meter ON/OFF Switch

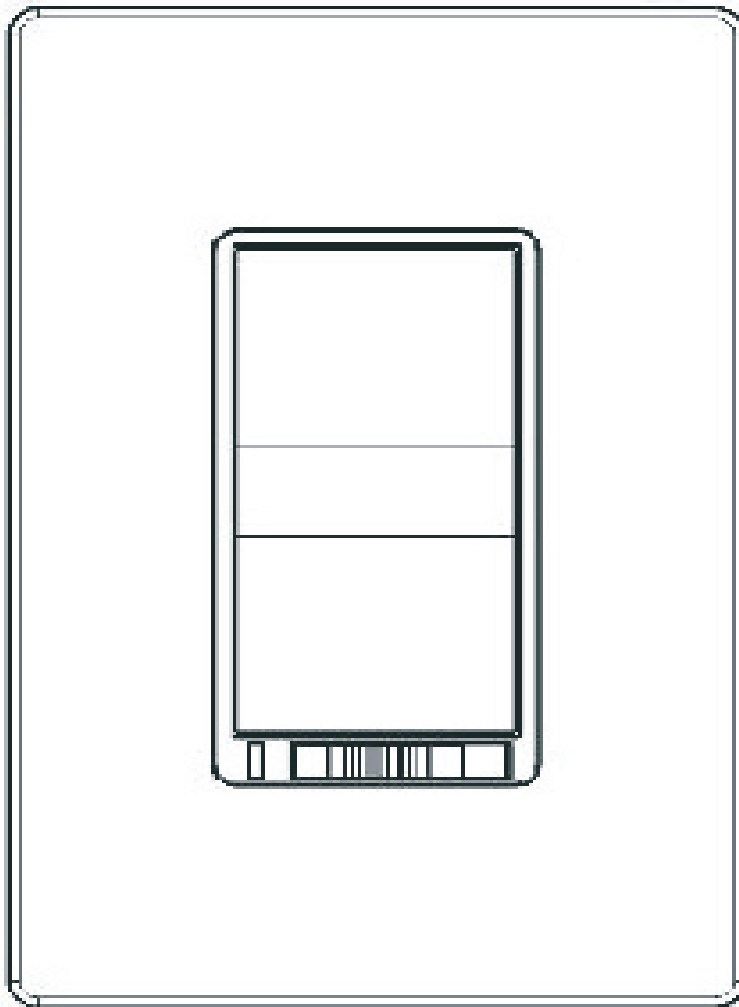

Features

- Perfect Replacement for regular wall switch, 120VAC, 15Amp
- Wireless Z-Wave technology creates a mesh network for command and control interoperability with other Z-Wave compliant controller and devices
- Manual and Remote ON/OFF control of any connected lighting and other electrical load
- Can be used for single pole or 3- Way (Multi-location) with ZW3K Auxiliary Switch (sold separately)
- Air-Gap Switch feature meets UL requirement and disconnect power from load locally
- Measures energy usage of the wired load

Description

The ZW15SM ON/OFF Switch is a perfect wireless manual and remote on/off control replacement of regular wall switch, controlling incandescent, LED, ballast and so on. This ZW15SM ON/OFF switch is fully compatible with other Z-Wave devices, provides programmable function in custom settings such as scenes, association, schedule event, etc. Also It can be added to most Z-Wave compliant controllers. As part of any Z-Wave network, each device can be remotely controlled by commands sent from Z-Wave controllers in real time, but also act as wireless repeater transmitting RF signal from one to another intended device, then extending the range of RF signal all over the system. Sliding Air-Gap switch to a totally disconnect power while replacing light bulbs and preventing from leakage current from the fixture(s).

Specification

| | |
|--------------------------|--|
| Manufacture | Enerwave |
| Color | White |
| Voltage | 120VAC, 60Hz |
| Maximum Load | 1000W Incandescent, 1200VA Ballast, 1800W 15A Resistive, 1/2HP Motor |
| Signal Frequency | 908.42 MHz |
| Range | Up to 100 feet line of sight |
| Operation Temperature | 32°F-104°F (0 °C-40 °C), Indoor Use |
| Standards and Compliance | Z-Wave Certified FCC UL, CUL Listed |
| Warranty | 2 years |